



TYTAN PROFESSIONAL Foam Cleaner

A multi-use product designed for removing uncured polyurethane foams or adhesives. It is useful for cleaning of can valves and PU-foam gun applicators. The cleaner is excellent for degreasing metal surfaces before application of silicones and polyurethane. The Cleaner is manufactured in compliance with requirements of ISO 9001:2008 standard.

DIRECTIONS FOR USE

1. MANUAL APPLICATION


Fix the enclosed spraying nozzle onto Cleaner valve. Spray the can valve and fresh stains of PU foam or adhesive with the cleaner. Remove stains with a dry cloth.

2. GUN APPLICATION

Unscrew the can of foam/adhesive from the gun. Press the gun trigger to remove foam residue. Fix the enclosed spraying nozzle onto Cleaner valve. Spray the cleaner on the valve of can and the gun adapter. Remove the nozzle and screw the can of Cleaner onto the gun. Press the gun trigger several times.

3. REMARKS / RESTRICTIONS

- Dissolving only uncured one-component PU-foams and adhesives.
- Cleaner has a destructive effect on the polystyrene, PVC and some other plastics, before use, test the cleaner on a given surface.

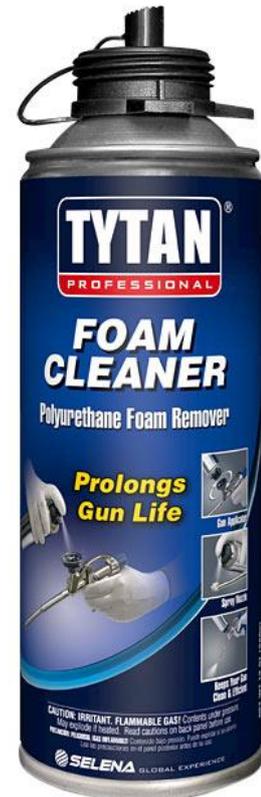

TECHNICAL DATA

PARAMETER (+23°C/50% RH)	Value
Can size [ml]	650
Nominal value [ml]	500
Solvent	acetone/ isopropyl alcohol/ ethyl acetate
Propellant	propane/ butane/ isobutane

TRANSPORT / STORAGE

Warranted shelf life is 36 months from the manufacturing date when stored in a dry and cool place in original cans away from fire source. Storage temperature: from +5°C to +30°C. It is not allowed to store cans of Cleaner in temperature exceeding +50°C.

Do not store the foam in the passenger compartment. Transported only in the trunk.

Detailed transport information is included in the Material Safety Data Sheet (MSDS).



The information contained herein is offered in good faith based on Producer's research and is believed to be accurate. However, because conditions and methods of use of our products are beyond our control, this information shall not be used in substitution for customer's tests to ensure that Producer's products are fully satisfactory for your specific applications. Producer's sole warranty is that the product will meet its current sales specifications. Your exclusive remedy for breach of such warranty is limited to refund of purchase price or replacement of any product shown to be other than as warranted. Producer specifically disclaims any other expressed or implied warranty of fitness for a particular purpose or merchantability. Producer disclaims liability for any incidental or consequential damages. Suggestions of use shall not be taken as inducements to infringe any patent.